

TRF Low Loss, Thermally Stable Laminates

TRF range of laminated materials represents a new generation of low loss, thermally stable laminates.



TRF is woven glass reinforced for enhanced dimensional stability coupled with Taconic's expertise in ceramic technology. TRF exhibits low and consistent Z-axis expansion across a wide temperature range, including and up to soldering conditions. The dielectric constant range may allow designers to make a seamless transition from FR-4 in applications where a lower loss material may be required.

Taconic is a world leader in RF laminates and high speed digital materials, offering a wide range of high frequency laminates and prepregs. These advanced materials are used in the fabrication of antennas, multilayer RF and high speed digital boards, interconnections and devices.

Benefits & Applications:

- Low Loss Ceramic Filled PTFE
- High Thermal Conductivity
- Stable DK over Temperature
- Stable DK over Frequency
- Very Low Z-Axis CTE

- Satellite Radio
- RFID

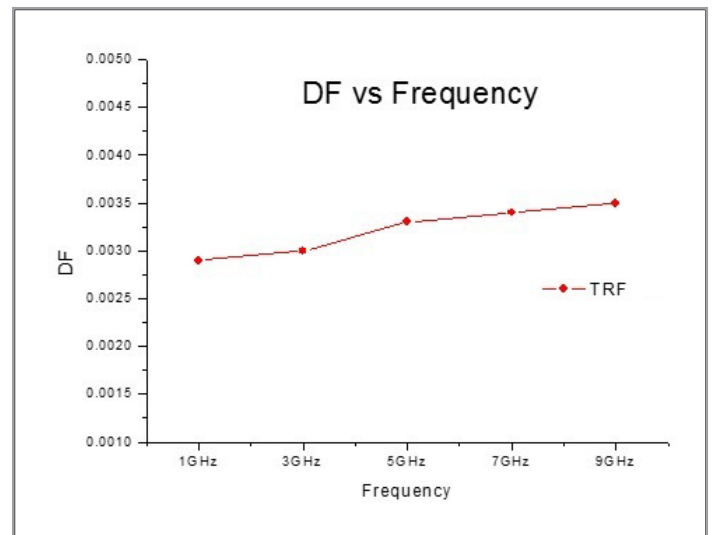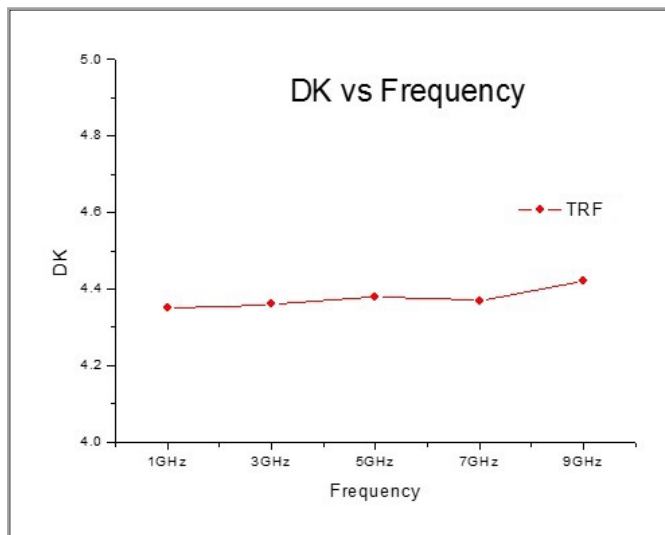

North & South America

Taconic - Headquarters
Petersburgh, NY 12138
Tel: 518-658-3202 / 1-800-833-1805
addinfo@4taconic.com

Europe/Middle East/Australia

Taconic International Ltd.
Republic of Ireland
Tel: +353-44-9395600
add@4taconic.com

Asia

Korea Taconic Company
Republic of Korea
Tel: +82-31-704-1858
sales@taconic.co.kr

China

Taconic Advanced Material (Suzhou) Co., Ltd.
Suzhou City, China
Tel: +86-512-6286-7170
tssales@taconic.co.kr

An ISO 9001 Registered Company

www.taconic-add.com

Commercial and Government Entity (CAGE) Code: 1C6Q9

TRF Low Loss, Thermally Stable Laminates

TRF-41 & 43 Typical Values

Property	Test Method	Unit	Value		Unit	Value	
			TRF-41	TRF-43		TRF-41	TRF-43
Dk @ 10 GHz	IPC-650 2.5.5.5.1 (m)		4.1	4.3		4.1	4.3
Df @ 10 GHz	IPC-650 2.5.5.5.1 (m)		0.0035			0.0035	
Moisture Absorption	IPC-650 2.6.2.1	%	0.06		%	0.06	
Volume Resistivity	IPC-650 2.5.17.1	Mohms/cm	8.0 x 10 ⁷		Mohms/cm	8.0 x 10 ⁷	
Surface Resistivity	IPC-650 2.5.17.1	Mohms	3.0 x 10 ⁷		Mohms	3.0 x 10 ⁷	
Flex strength (MD)	IPC-650 2.4.4	lbs./inch	17,000		N/mm ²	177	
Flex strength (CD)	IPC-650 2.4.4	lbs./inch	15,000		N/mm ²	103	
Peel Strength (CH)	IPC-650 2.4.8	lbs./inch	8		N/mm	1.4	
Thermal Conductivity	IPC-650 2.4.50	W/m-k	0.43		W/m-k	0.43	
CTE (X axis)	ASTM D 3386 (TMA)	ppm/°C	9		ppm/°C	9	
CTE (Y axis)	ASTM D 3386 (TMA)	ppm/°C	9		ppm/°C	9	
CTE (Z axis)	ASTM D 3386 (TMA)	ppm/°C	40		ppm/°C	40	
Flammability	UL-94		V-0			V-0	

All reported values are typical and should not be used for specification purposes. In all instances, the user shall determine suitability in any given application.

Designation	Dk
TRF-41	4.10 +/-0.15
TRF-43	4.30 +/- 0.15

Typical Thicknesses	
Inches	mm
0.0080	0.20
0.0160	0.41
0.0240	0.61
0.0320	0.81
0.0400	1.02
0.0640	1.63*
0.1200	3.05*

*Parts of thickness specification not less than 64 mil products would be IPC-4103/class B.

Our standard sheet size is 36" x 48" (914 mm x 1220 mm). Please contact our customer service department for availability of other sizes.

Please see our Product Selector Guide for information on available copper cladding.

An example of our part number is: TRF-43-0640-CL1/CL1 - 18" x 24" (457 mm x 610 mm)

