

# RO4835T™ Laminate

## Data Sheet

RO4835T™ laminates are 3.3 Dk low loss, spread glass reinforced, ceramic thermoset materials that were designed as inner-layers for use in multilayer board designs, and to complement RO4835™ laminates when thinner cores are needed.


The world has seen the ongoing evolution of mobile networks, GSM, WCDMA and LTE that has enabled users to grow data consumption at amazing rates and Rogers high frequency materials have played a key role in this market. Antennas, Power Amplifiers, and microwave backhaul radios are needed to create these mobile networks and dielectric constant controlled, low loss materials are the foundation on which this technology is based. High frequency materials are a key enabling technology in the development of the next generation mobile network, 5G which will reach frequencies well into millimeter wave bands where multilayer board designs are prevalent. RO4835T laminates' multiple thickness thin core options are fully compatible with RO4450F™ bondply, the new RO4450T™ thin bondplies, and CU4000™/CU4000 LoPro® foil lamination options. When coupled with RO4835 laminates and RO4000® bonding materials, these material sets provide designers flexibility to achieve requirements related to high multilayer board (MLB) count designs.

RO4835T laminates offer the same resistance to oxidation as RO4835 laminates, are low loss, have excellent Dk tolerance, and a tight thickness control for outstanding, repeatable wireless performance. They feature high performance material attributes that provide the optimum blend of price, performance and durability, and can be fabricated using standard epoxy/glass (FR-4) processes.

RO4835T laminates utilize RoHS compliant flame-retardant technology for applications requiring UL 94 V-0 certification. These materials conform to the requirements of IPC-4103, slash sheet / 240.



## Data Sheet

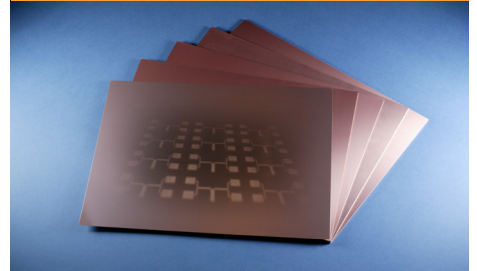

### FEATURES AND BENEFITS:

Significantly improved oxidation resistance compared to typical thermoset microwave materials

- Designed for performance sensitive, high volume applications.

Low loss

- Excellent electrical performance allows application with higher operating frequencies.

Spread Glass

- Minimizes local variation of dielectric constant.

Tight dielectric constant tolerance

- Controlled impedance transmission lines

Lead-free process compatible

- No blistering or delamination

Low Z-axis expansion

- Reliable plated through holes

Low in-plane expansion coefficient

- Remains stable over an entire range of circuit processing temperatures

CAF resistant

### TYPICAL APPLICATIONS:

- Point-to-point Microwave
- Power Amplifiers
- Cellular infrastructure antennas
- Phased-Array Radar
- RF Components
- Test and Measurement

| RO4835T™                                   | TYPICAL VALUES [1]       |                          |                          |                          | Direction | Units               | Conditions                   | Test Method                                            |
|--------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-----------|---------------------|------------------------------|--------------------------------------------------------|
|                                            | 2.5 (0.064)              | 3 (0.076)                | 4 (0.101)                | 5(0.127)                 |           |                     |                              |                                                        |
| <b>Electrical Properties</b>               |                          |                          |                          |                          |           |                     |                              |                                                        |
| <sup>[2]</sup> Dielectric Constant Process | 3.33                     | 3.33                     | 3.32                     | 3.33                     | Z         | -                   | 10 GHz - 23°C                | IPC TM-650 2.5.5.5<br><sup>[2]</sup> Clamped Stripline |
| Dielectric Constant Design                 | 3.52                     | 3.50                     | 3.49                     | 3.48                     | Z         | -                   | 8 GHz - 40 GHz               | Differential Phase Length Method                       |
| Dissipation Factor                         | 0.0030                   | 0.0034                   | 0.0036                   | 0.003                    | Z         | -                   | 10 GHz - 23°C                | IPC TM-650 2.5.5.5                                     |
| Volume Resistivity                         | 1.34 x 10 <sup>8</sup>   | 1.24 x 10 <sup>8</sup>   | 1.43 x 10 <sup>8</sup>   | 6.27 x 10 <sup>9</sup>   | -         | MΩ-cm               | 23°C/50% RH                  | IPC TM-650 2.5.17.1                                    |
| Surface Resistivity                        | 1.17 x 10 <sup>6</sup>   | 1.47 x 10 <sup>6</sup>   | 1.11 x 10 <sup>6</sup>   | 5.83 x 10 <sup>7</sup>   | X, Y      | MΩ                  | 23°C/50% RH                  | IPC TM-650 2.5.17.1                                    |
| Electrical Strength                        | 1320                     | 1260                     | 1265                     | 1960                     | Z         | V/mil               | 23°C/50% RH                  | IPC TM-650 2.5.6.2                                     |
| <b>Thermal Properties</b>                  |                          |                          |                          |                          |           |                     |                              |                                                        |
| Td                                         | 389                      | 389                      | 389                      | 389                      | -         | °C TGA              | 2 hrs @ 105°C                | IPC TM-650 2.3.40                                      |
| Tg                                         | >280                     | >280                     | >280                     | >280                     | -         | °C TMA              | -                            | IPC-TM-650 2.4.24.5                                    |
| Coefficient of Thermal Expansion           | 14                       | 15                       | 17                       | 14                       | X         | ppm/°C              | -55°C - 288°C                | IPC TM-650 2.4.41                                      |
|                                            | 16                       | 16                       | 13                       | 16                       | Y         |                     |                              |                                                        |
|                                            | 62                       | 60                       | 60                       | 62                       | Z         |                     |                              |                                                        |
| Thermal Conductivity                       | 0.52                     | 0.52                     | 0.54                     | 0.52                     | Z         | W/m <sup>2</sup> /K | 50°C                         | ASTM D5470                                             |
| <b>Mechanical Properties</b>               |                          |                          |                          |                          |           |                     |                              |                                                        |
| Copper Adhesion                            | 3.9<br>(0.68)            | 3.9<br>(0.68)            | 3.7<br>(0.65)            | 3.7<br>(0.65)            | Z         | pli<br>(N, mm)      | 1 oz. EDC After Solder Float | IPC TM-650 2.4.8                                       |
| Flexural Strength                          | 226 (32.8)<br>214 (31.0) | 227 (32.9)<br>214 (31.0) | 265 (38.4)<br>157 (22.8) | 226 (32.8)<br>214 (31.0) | X<br>Y    | Mpa (kpsi)          | -                            | IPC-TM-650 2.4.4                                       |
| Tensile Strength                           | 163<br>(23.6)            | 102<br>(14.8)            | 111<br>(16.1)            | 163<br>(23.6)            | Y         | Mpa<br>(kpsi)       | RT                           | ASTM D638                                              |
| Tensile Modulus                            | 11,300<br>(1640)         | 9310<br>(1350)           | 12,400<br>(1800)         | 11,300<br>(1640)         | Y         | Mpa<br>(kpsi)       | RT                           | ASTM D638                                              |
| Dimensional Stability                      | <0.5                     | <0.5                     | <0.5                     | <0.5                     | X, Y      | mm/m<br>(mils/inch) | after etch +E2/150°C         | IPC-TM-650 2.4.39a                                     |
| <b>Physical Properties</b>                 |                          |                          |                          |                          |           |                     |                              |                                                        |
| Density                                    | 1.81                     | 1.81                     | 1.80                     | 1.81                     | -         | gm/cm <sup>3</sup>  | 23°C                         | ASTM D792                                              |
| Flammability                               | V-0                      | V-0                      | V-0                      | V-0                      | -         | -                   | -                            | UL 94                                                  |
| Moisture Absorption                        | 0.20                     | 0.15                     | 0.13                     | 0.12                     | -         | %                   | 48 hrs & 50°C                | IPC TM-650 2.6.2.1                                     |
| Lead-Free Process Compatible               | YES                      | YES                      | YES                      | YES                      | -         | -                   | -                            | -                                                      |

| Standard Thicknesses |                   | Standard Panel Size      |  | Standard Copper Cladding                                                  |  |
|----------------------|-------------------|--------------------------|--|---------------------------------------------------------------------------|--|
| 0.0025" (0.064mm)    | 0.0040" (0.101mm) | 12" X 18" (305 X 457 mm) |  | ½ oz. (18 µm) very low profile (VLP) electrodeposited copper foil (5E/5E) |  |
| 0.0030" (0.076mm)    | 0.0050" (0.127mm) | 24" X 18" (610 X 457 mm) |  | 1 oz. (35 µm) very low profile (VLP) electrodeposited copper foil (1E/1E) |  |

Notes:  
 [1] Typical values are a representation of an average value for the population of the property. For specification values contact Rogers Corporation.  
 [2] The IPC clamped stripline method can potentially lower the actual dielectric constant due to presence of airgaps between the laminates under test and the resonator card. Dielectric constant in practice may be higher than the values listed.

Prolonged exposure in an oxidative environment may cause changes to the dielectric properties of hydrocarbon based materials. The rate of change increases at higher temperatures and is highly dependent on the circuit design. Although Rogers' high frequency materials have been used successfully in innumerable applications and reports of oxidation resulting in performance problems are extremely rare, Rogers recommends that the customer evaluate each material and design combination to determine fitness for use over the entire life of the end product.

The information in this data sheet is intended to assist you in designing with Rogers' circuit materials. It is not intended to and does not create any warranties express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on this data sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application. These commodities, technology and software are exported from the United States in accordance with the Export Administration regulations. Diversion contrary to U.S. law prohibited.

The Rogers' logo, RO4450F, RO4450T, RO4835, RO4835T, CU4000, LoPro, and Helping power, protect, connect our world are trademarks of Rogers Corporation or one of its subsidiaries.  
 © 2021 Rogers Corporation, Printed in U.S.A., All rights reserved. Revised 1541 121721 Publication #92-194